



# NATIONAL CERTIFIED TESTING LABORATORIES

8350 PARKLINE BLVD. STE. 12 • ORLANDO, FLORIDA 32809 • TELEPHONE (407) 240-1356  
FAX (407) 240 - 8882  
www.nctlinc.com

Florida Building Code TAS 201-94  
Florida Building Code TAS 202-94  
Florida Building Code TAS 203-94

## STRUCTURAL, IMPACT & CYCLING TEST REPORT SUMMARY

### RENDERED TO:


Kommerling USA, Inc.  
3402 Stanwood Boulevard  
Huntsville, AL 35811

"PREMIDOOR" 88MM Lift & Slide Door OX

SUMMARY OF RESULTS			
<b>Installation: Screw Installation</b>			
Specimen 1	TAS 202	+ 55.0 psf.	- 55.0 psf.
Specimens 2, 3, 4	TAS 201/203	+ 55.0 psf.	- 55.0 psf.
Specimen 1			
<b>Air Infiltration per ASTM E283 in accordance with TAS 202-94</b>			
		Infiltration:	<0.01 cfm/ft <sup>2</sup>
<b>Water Penetration Resistance per ASTM E331 in accordance with TAS 202-94</b>			
		8.25 psf - Passed/No water penetration	
Specimen 1			
<b>Static Air Pressure per ASTM E330 in accordance with TAS 202-94</b>			
Design Load Pressure		+/- 55.0 psf	
Overload/ Structural Load Pressure		+/- 82.5 psf.	
<b>Forced Entry Resistance per ASTM F588 in accordance with TAS 202-94</b>			
		Passed - Grade 10	
Specimens 2, 3 & 4			
<b>Large Missile Impact/ Pressure Loading in accordance with TAS 201-94 and TAS 203-94</b>			
Impacts rejected without allowing penetration and the product shows no resultant failure or distress			

Test Completion Date: 12/14/17

Reference must be made to NCTL Report Number NCTL-210-4082-01 report dated 01/02/18 for complete test sample description and data.

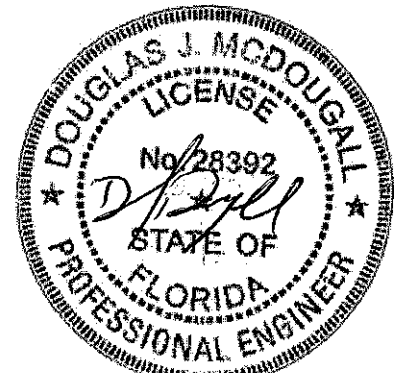

02/14/18